




BEARING PRECISION AXLE CORP.

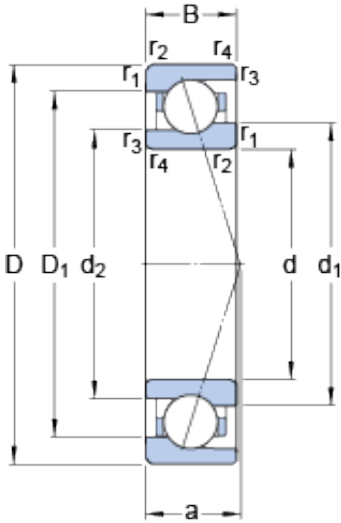

71911 CE/P4A Bearing 2D drawings and 3D CAD models

71911 CE/P4A SKF High Speed Angular Contact Ball Bearings

Bearing No. 71911 CE/P4A

Size	80x55x13 mm
Bore Diameter	80 mm
Outer Diameter	55 mm
Width	13 mm
d	55 mm
D	80 mm
B	13 mm
d ₁	62.75 mm
d ₂	60.7 mm
D ₁	72.3 mm
r _{1,2} - min.	1 mm
r _{3,4} - min.	0.3 mm
a	16.2 mm
d _a - min.	59.6 mm
d _b - min.	57 mm
D _a - max.	75.4 mm
D _b - max.	78 mm
r _a - max.	1 mm
r _b - max.	0.3 mm
d _n	64.6 mm
Basic dynamic load rating - C	15.3 kN
Basic static load rating - C ₀	10.6 kN
Fatigue load limit - P _u	0.455 kN
Limiting speed for grease	24000 r/min



BEARING PRECISION AXLE CORP.

Lubrication	
Limiting speed for oil lubrication	36000 mm/min
Ball - D_w	7.938 mm
Ball - z	21
G_{ref}	2.3 cm3
Calculation factor - f_0	8.4
Preload class A - G_A	83 N
Preload class B - G_B	250 N
Preload class C - G_C	500 N
Calculation factor - f	1.16
Calculation factor - f	1
Calculation factor - f_{2A}	1
Calculation factor - f_{2B}	1.04
Calculation factor - f_{2C}	1.08
Calculation factor - f_{HC}	1
Preload class A	42 N/micron
Preload class B	67 N/micron
Preload class C	92 N/micron
Category	Precision Ball Bearings
Inventory	0.0
Manufacturer Name	SKF
Minimum Buy Quantity	N/A
Weight / Kilogram	0.201
Product Group	B04270
Enclosure	Open
Precision Class	ABEC 7 ISO P4
Material - Ball	Steel
Number of Bearings	1 (Single)
Contact Angle	15 Degree
Preload	None



BEARING PRECISION AXLE CORP.

Raceway Style	1 Rib Inner Ring and Outer Ring
Cage Material	Phenolic
Rolling Element	Ball Bearing
Flush Ground	No
Inch - Metric	Metric
Other Features	Single Row Angular Contact High Precision
Long Description	55MM Bore; 80MM Outside Diameter; 13MM Width; Open Enclosure; ABEC 7 ISO P4 Precision; Steel Ball Material; 1 (Single) Bearings; 15 Degree Contact Angle; Phenolic Cage Material; 1 Rib Inner Ring and
Category	Precision Ball Bearings
UNSPSC	31171531
Harmonized Tariff Code	8482.10.50.28
Noun	Bearing
Keyword String	Angular Contact Ball
Manufacturer URL	http://www.skf.com
Manufacturer Item Number	71911 CE/P4A
Weight / LBS	0.443
Outside Diameter	3.15 Inch 80 Millimeter
Width	0.512 Inch 13 Millimeter
Bore	2.165 Inch 55 Millimeter
d_1	62.75 mm
d_2	60.7 mm
D_1	72.3 mm
$r_{1,2}$ min.	1 mm
$r_{3,4}$ min.	0.3 mm
d_a min.	59.6 mm
d_b min.	57 mm



BEARING PRECISION AXLE CORP.

D_a max.	75.4 mm
D_b max.	78 mm
r_a max.	1 mm
r_b max.	0.3 mm
d_n	64.6 mm
Basic dynamic load rating C	15.3 kN
Basic static load rating C_0	10.6 kN
Fatigue load limit P_u	0.455 kN
Attainable speed for grease lubrication	24000 r/min
Attainable speed for oil-air lubrication	36000 r/min
Ball diameter D_w	7.938 mm
Number of balls z	21
Reference grease quantity G_{ref}	2.3 cm ³
Preload class A G_A	83 N
Static axial stiffness, preload class A	42 N/ μ m
Preload class B G_B	250 N
Static axial stiffness, preload class B	67 N/ μ m
Preload class C G_C	500 N
Static axial stiffness, preload class C	92 N/ μ m
Calculation factor f	1.16
Calculation factor f_1	1
Calculation factor f_{2A}	1
Calculation factor f_{2B}	1.04
Calculation factor f_{2C}	1.08
Calculation factor f_{HC}	1
Calculation factor f_0	8.4
Mass bearing	0.17 kg