




BEARING PRECISION AXLE CORP.

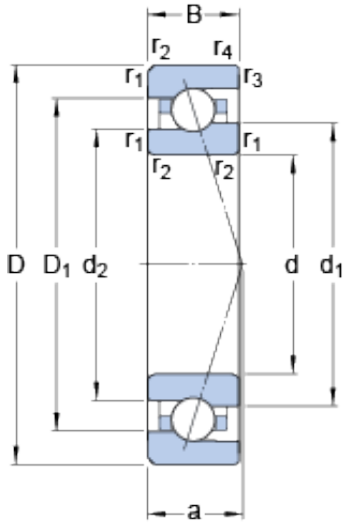

7011 CE/P4A Bearing 2D drawings and 3D CAD models

7011 CE/P4A SKF High Speed Angular Contact Ball Bearings

Bearing No. 7011 CE/P4A

Size	90x55x18 mm
Bore Diameter	90 mm
Outer Diameter	55 mm
Width	18 mm
d	55 mm
D	90 mm
B	18 mm
d ₁	67.73 mm
d ₂	65.6 mm
D ₁	77.25 mm
r _{1,2} - min.	1.1 mm
r _{3,4} - min.	0.6 mm
a	18.8 mm
d _a - min.	61 mm
d _b - min.	61 mm
D _a - max.	84 mm
D _b - max.	85.8 mm
r _a - max.	1 mm
r _b - max.	0.6 mm
d _n	69.6 mm
Basic dynamic load rating - C	16.8 kN
Basic static load rating - C ₀	12.2 kN
Fatigue load limit - P _u	0.52 kN
Limiting speed for grease	22000 r/min



BEARING PRECISION AXLE CORP.

Lubrication	
Limiting speed for oil lubrication	34000 mm/min
Ball - D_w	7.938 mm
Ball - z	24
G_{ref}	5 cm3
Calculation factor - f_0	8.4
Preload class A - G_A	90 N
Preload class B - G_B	270 N
Preload class C - G_C	540 N
Calculation factor - f	1.07
Calculation factor - f	1
Calculation factor - f_{2A}	1
Calculation factor - f_{2B}	1.03
Calculation factor - f_{2C}	1.05
Calculation factor - f_{HC}	1
Preload class A	46 N/micron
Preload class B	72 N/micron
Preload class C	98 N/micron
Category	Precision Ball Bearings
Inventory	0.0
Manufacturer Name	SKF
Minimum Buy Quantity	N/A
Weight / Kilogram	0.411
Product Group	B04270
Enclosure	Open
Precision Class	ABEC 7 ISO P4
Material - Ball	Steel
Number of Bearings	1 (Single)
Contact Angle	15 Degree
Preload	None



BEARING PRECISION AXLE CORP.

Raceway Style	1 Rib Inner Ring and Outer Ring
Cage Material	Phenolic
Rolling Element	Ball Bearing
Flush Ground	No
Inch - Metric	Metric
Other Features	Single Row Angular Contact High Precision
Long Description	55MM Bore; 90MM Outside Diameter; 18MM Width; Open Enclosure; ABEC 7 ISO P4 Precision; Steel Ball Material; 1 (Single) Bearings; 15 Degree Contact Angle; Phenolic Cage Material; 1 Rib Inner Ring and
Category	Precision Ball Bearings
UNSPSC	31171531
Harmonized Tariff Code	8482.10.50.28
Noun	Bearing
Keyword String	Angular Contact Ball
Manufacturer URL	http://www.skf.com
Manufacturer Item Number	7011 CE/P4A
Weight / LBS	0.906
Bore	2.165 Inch 55 Millimeter
Width	0.709 Inch 18 Millimeter
Outside Diameter	3.543 Inch 90 Millimeter
d_1	67.73 mm
d_2	65.6 mm
D_1	77.25 mm
$r_{1,2}$ min.	1.1 mm
$r_{3,4}$ min.	0.6 mm
d_a min.	61 mm
d_b min.	61 mm



BEARING PRECISION AXLE CORP.

D_a max.	84 mm
D_b max.	85.8 mm
r_a max.	1 mm
r_b max.	0.6 mm
d_n	69.6 mm
Basic dynamic load rating C	16.8 kN
Basic static load rating C_0	12.2 kN
Fatigue load limit P_u	0.52 kN
Attainable speed for grease lubrication	22000 r/min
Attainable speed for oil-air lubrication	34000 r/min
Ball diameter D_w	7.938 mm
Number of balls z	24
Reference grease quantity G_{ref}	5 cm ³
Preload class A G_A	90 N
Static axial stiffness, preload class A	46 N/ μ m
Preload class B G_B	270 N
Static axial stiffness, preload class B	72 N/ μ m
Preload class C G_C	540 N
Static axial stiffness, preload class C	98 N/ μ m
Calculation factor f	1.07
Calculation factor f_1	1
Calculation factor f_{2A}	1
Calculation factor f_{2B}	1.03
Calculation factor f_{2C}	1.05
Calculation factor f_{HC}	1
Calculation factor f_0	8.4
Mass bearing	0.39 kg